



SL26SL SPEED LEVEL

DIMENSIONS		SL26SL
Max. working height		10.0m
Max. platform height (A)		8.0m
Platform size (stowed)		1.72m x 3.66m
Platform size (extended)		1.72m x 4.6m
Overall width (D)		2.13m
Overall length (C)		3.79m
Stowed height (B)		2.6m
Min. height (guardrails folded)		1.85m
Chassis ground clearance		305mm
Axle ground clearance		195mm
Standard platform extension		1m
PERFORMANCE		
Platform capacity (SWL)		680kg
Max. drive height		8.0m
Max. wind speed		12.5m/s
Max. drive speed (stowed)		6.4km/h
Max. drive speed (elevated)		0.8km/h
Raise/lower time		21/32 seconds
Gradeability		50%
Max. levelling, front to rear		9°
Max. levelling, side to side		13°
Inside turning radius		3.9m
Outside turning radius		5.64m
Tyres		26 x 12.00 - 12 NHS Foam filled
Controls		proportional joystick
Drive system		4 wheel drive with hydraulic motors and flow dividers
POWER		
Power source		Kubota D-902 water-cooled diesel Tier 4 Final
WEIGHT		
Weight		3,500kg

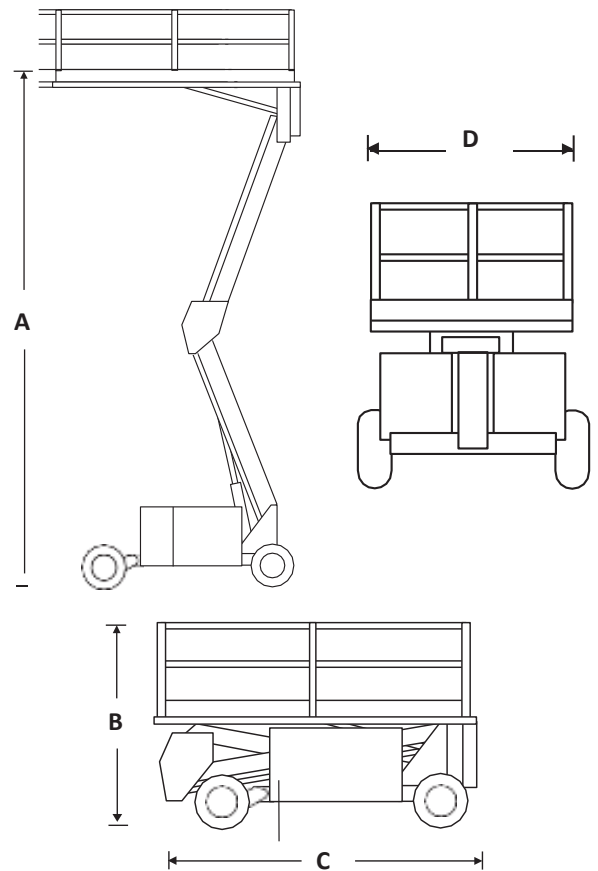

LEVELLING CAPABILITIES

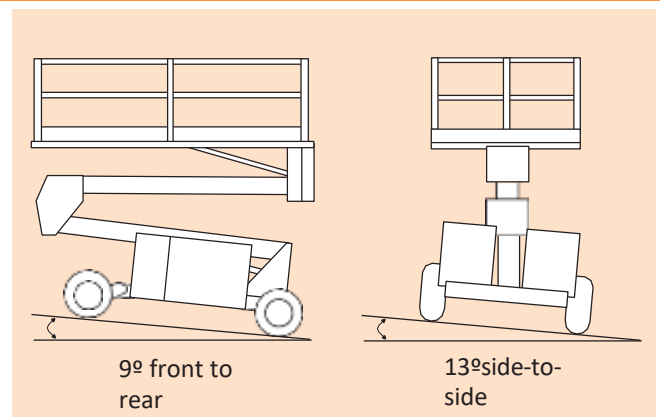

STANDARD FEATURES

- Automatic powered platform levelling
- Oscillating front axle
- Roll-out deck extension
- Descent alarm
- High grip all-terrain tyres
- Dual multi-disc brakes
- Proportional controls
- Power line to platform
- Fold-down guardrails
- All motion alarm
- Flashing amber light
- Hour meter & on-board diagnostics display
- Horn
- 2 year parts & labour, 5 year structural warranty
- CE approved