AWP 20S - 36S Push Around Aerial Work Platform

Specifications

MODELS	AWP-20S	AWP-25S	AWP-30S	AWP-36S
MEASUREMENTS	**Metric**	**Metric**	**Metric**	**Metric**
Working height	8.12 m	9.57 m	11 m	13.10 m
Platform height	6.12 m	7.57 m	9 m	11.10 m
A Height - stowed	1.98m	1.98m	1.98m	2.78 m
B - tilted back	1.78 m	1.84 m	1.89 m	1.92 m
C Length - stowed	1.24m	0.31m	1.35m	1.40 m
D Length - tilted back	2.11m	2.11m	2.11m	2.97 m
E Width	0.74 m	0.74 m	0.74 m	0.74 m
PRODUCTIVITY				
Lift capacity	159 kg	159 kg	159 kg	159 kg
Indoor:				
F G Outrigger footprint (l/w)	1.55 x 1.35 m	1.75 x 1.55 m	1.93 x 1.73 m	2.12x1.91 m
H Corner access	0.38 m	0.48 m	0.56 m	0.74 m
I J Wall access front/side	0.15 x 0.33 m	0.18 x 0.43 m	0.20 x 0.53 m	0.36 x 0.64 m
Outdoor:				
F G Outrigger footprint (l/w)	2.46 x 2.26 m	2.97 x 2.79 m	2.97 x 2.79 m	3.53x3.33 m
H Corner access***	0.48m	0.76m	0.69m	1.02m
I J Wall access front/side	0.48 x 0.81 m	0.74 x 1.07 m	0.69 x 1.07 m	1.02x1.32 m
Platform Dimensions: (l/w/h)	0.69 x 0.66 x 1.14 m	0.69 x 0.66 x 1.14 m	0.69 x 0.66 x 1.14 m	0.69 x 0.66 x 1.14 m
POWER				
Powersource- AC or DC models	12 V DC / 220/50-60 Hz AC			
WEIGHT				
DC model	347 kg	371 kg	393 kg	502 kg

STANDARDS COMPLIANCE ANSI A92.3, CSA B354.1, CE Compliance, AS 1418.10

STANDARD FEATURES cont.
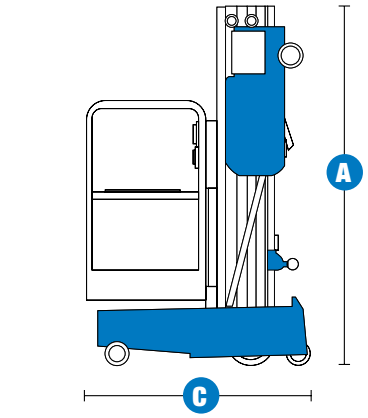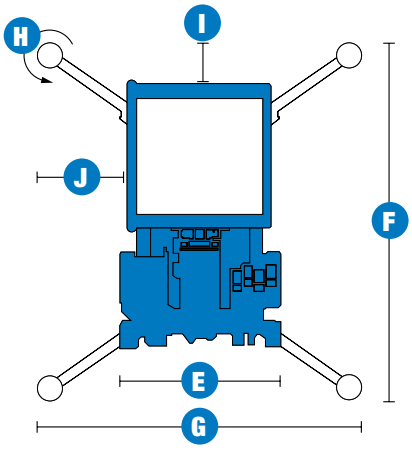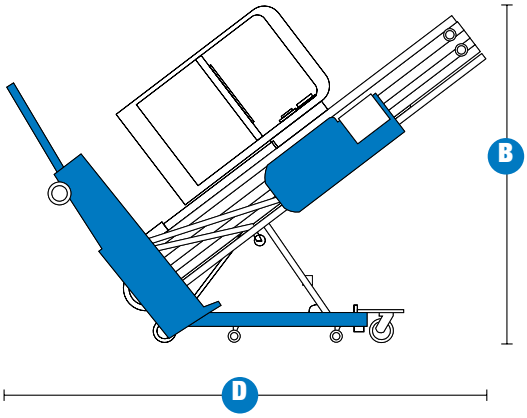
- Sliding mid-rail standard platform
- Auxiliary platform lowering
- Most rigid mast in the industry
- Rocker base system for manoeuvreability
- Tilt back frame (standard on AWP-36)
- Easily rolls through standard doorways
- AC power to platform
- Dual activated up/down switch
- Small outrigger footprints
- Outrigger storage sockets
- Easy loading in utes
- Tie down attachment points
- Overhead crane attachment point
- Wide forklift pockets
- Rear access forklift pocket
- LED lights confirm proper set-up
- Operational warning light and descent alarm package